SCANSONIC

P3000 BT

UK User Manual
DK Brugervejledning
DE Bedienungsanleitung
FR Guide d’instructions
IT Manuale di istruzioni

Contents

02 CONTENTS
03 INFORMATION
04 FRONT AND REAR PANEL OVERVIEW
06 CONNECTING YOUR RADIO
06 OPERATING YOUR RADIO – DAB
07 SELECTING A STATION – DAB
07 INFORMATION SERVICES – DAB
08 OPERATING YOUR RADIO – FM
08 DISPLAY MODES – FM
09 AUX MODE
09 CONNECTING TO BLUETOOTH
10 MANUAL CLOCK SETTINGS
10 SETTING THE ALARM
11 EQ SETTING
11 RESETTING THE RADIO
12 SPECIFICATION

Information

Congratulations on your new radio.
Please take a moment to read this manual.

Safety Instructions.
Please store this instruction manual for future reference.

- Place the unit on a solid surface.
- Do not expose Scansonic P3000BT to high humidity, direct sunlight, dirt, heavy vibration or extreme temperatures.
- Do not open the cabinet. Only qualified technicians are allowed to handle this Scansonic radios internal parts.
- If service or repair is required, this must also be done by qualified technicians.
- User a duster or a slightly damp, soft and Non-fluffy rag to clean the cabinet. Do not use corrosive or strong cleaning agents.
- Make sure no liquids or moisture penetrates the radio during cleaning. Unplug the radio before cleaning it.

Unplug the radio in following cases:

- Foreign objects or liquids have penetrated the radio.
- The radio cannot be operated properly.
- The cabinet has been damaged.
- The mains plug or the mains cable is defective.
- If the radio is not to be used for a longtime.

Disclaimer
Despite our best efforts we cannot guarantee that the technical data indicated are correct, complete and updated, We, Scansonic, reserve the right to make technical changes without prior notice.

SCANSONIC P3000 BT

Front panel

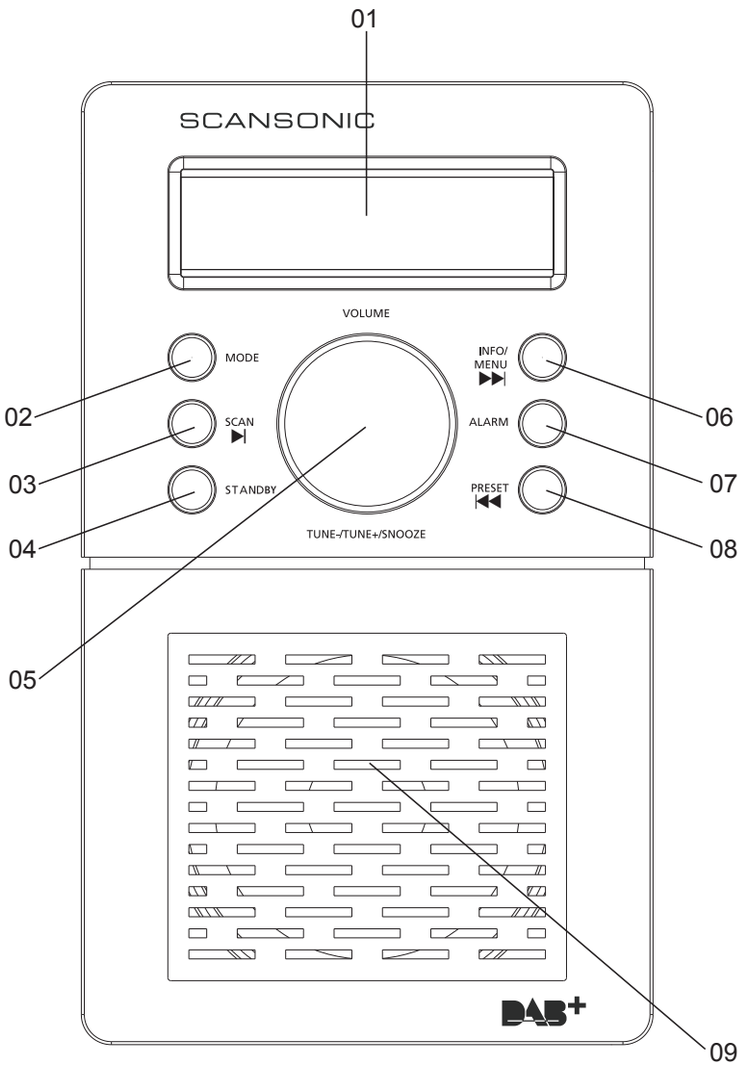

Rear panel

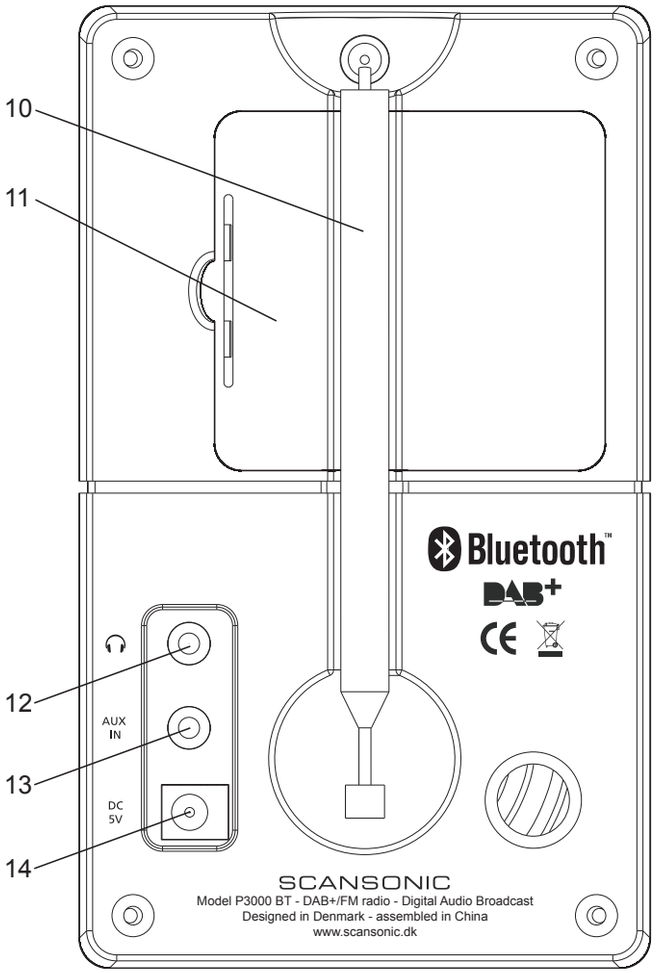

01 Display	16 x 2 Digit LCD display showing all information on the radio
02 MODE	Press to select DAB radio, FM radio, AUX input or Bluetooth
03 SCAN	Press to SCAN radio channels
04 STANDBY	Press to go to STANDBY mode. Press Longer to Shut down radio
05 ROTARY	Volume Control / SELECT / Tune+ Tune- / SNOOZE button
06 INFO / MENU	INFO: Press to retrieve information from Radio Stations MENU: Press 2 seconds Manual Tune / EQ / Alarm / Sleep / Clock System Reset
07 ALARM	Press to display Alarm 1 / Alarm 2
08 PRESET	Press to preset radio stations 1-10
09 SPEAKER	3” Full range loudspeaker
10 ANTENNA	The radio comes with a telescopic antenna. To Improve FM reception, adjust the antenna for best reception
11 BATTERY	This radio can also be played with batteries (AA size x 4)
12 HEADPHONE	Connect a separate stereo headset to this input to listen to the radio. Connecting headset will disable the main speaker
13 AUX IN	Connect a stereo or mono audio source (iPod, iPhone, iPad, MP3 Player, TV etc). Use 3.5mm jack enclosed to connect to devices
14 DC6V IN	Use this input to the enclosed DC Power Supply

Connecting your radio

01 Your radio is supplied with a Mains Adaptor

02 Place your radio on a flat surface

03 Insert the adaptor plug into the DC socket on the back of your radio

04 Plug the adaptor into the 230 volts mains socket outlet

Connecting your radio - DAB

01 Carefully extend the telescopic antenna

02 Press the STANDBY button to switch on radio, the display will show “SCANSONIC” and the radio will come into DAB mode automatically

03 First time the radio is used a QUICK SCAN will be carried out, if the radio has been and turned back ON from STANDBY mode, the last used station will be selected

04 For a full SCAN please press “SCAN” button for 2 seconds

05 When scanning is completed the display shall indicate the number of found stations

06 You may PRESET your favorite stations by pressing PRESENT button and scroll to the position you would like to save and then press SELECT button for 2 seconds

07 If no Stations are found after scanning the display will show “NO STATIONS AVAILABLE” and it is necessary to relocate the radio to a position with better reception

Selecting a station - DAB

01 The display show the name of the station selected

02 Press down ROTARY KNOB to select TUNE – or TUNE + button to scroll the station list and find the station

03 Press down ROTARY KNOB to select the desired station

Information services - DAB

Your radio shall display different info which can be selected by pressing the INFO button

01	Date	shows the current date and time
02	Ensemble	displays the name of broadcaster of the DAB Station
03	Genre	displays the type of the selected station: Pop, Rock, News, Jazz Etc.
04	Data Speed	display the digital bit rate and mono / stereo of selected station
05	Station Frequency	displays the frequency of the selected station
06	Radio text (DLS)	displays text messages from the station

Operating your radio - FM

01 Carefully extend the telescopic antenna

02 Press STANDBY to power on the radio (Use MODE to select to FM)

03 Press SCAN button to automatically scan upwards

04 Press SCAN button 2 seconds to automatically scan downwards

05 You may PRESET your favorite stations by pressing PRESENT button and scroll to the position you would like to save and then press SELECT button for 2 seconds

Display modes - FM

Your radio shall display below information by pressing the INFO button

01	Date	shows the current date and time
02	Station Name	shows the name of the station or the frequency of the station
03	Audio	displays Mono or Stereo
04	Program	displays the name of Program If not available “Prog Type N/A” shall be displayed
05	Radio text	displays text messages from the station

AUX mode

CONNECT TO YOUR IPOD, IPHONE, IPAD & OTHER AUDIO SOURCES

The radio has an auxiliary input. This input can be used to connect an external source such as iPod, iPhone, iPad, MP3 Players and other audio sources by using the included 3.5mm mini jack cable.

To connect please connect the 3.5mm mini jack cable to your radio and to your other device.

Press MODE button to select the AUX mode.

P3000 will go into STANDBY mode after 5 minutes if no audio signal is detected.

Connecting to Bluetooth

Once the mode is selected to Bluetooth mode, it is ready to search for Bluetooth devices

01 Turn on Bluetooth from any handheld smartphones, tablets or PC. You shall see P3000BT as your new Device

02 Select P3000BT and the connection shall be connected automatically

03 Music streaming is ready on P3000BT

Manual clock settings

The radio clock can be set manually as below. (Navigate by using Rotary)

01 Press MENU 2 Sec > Clock Setting > Auto Update or Manual Update

02 With Rotary please select Date Setting DD : MM : YYYY

03 With Rotary please select Time Setting: HH : MM

Setting the alarm

The radio alarm allows you to wake up to your desired radio station or a buzz.

01 Press ALARM button 2 Sec

02 With Rotary Select Alarm number: 1 or 2

03 With Rotary Select Alarm mode: Off / Beep / DAB / FM

04 With Rotary Select Alarm option: Once / Daily / Weekday / Weekend

05 With Rotary Select Alarm Time: 00 : 00

06 With Rotary Adjust the Alarm Level 1-20

07 When Alarm is active and to turn off press MODE or STANDBY

08 When Alarm is active press down on Rotary to enter SNOOZE
Press Alarm button once to delete SNOOZE

EQ setting

The radio has an EQ function that allows your radio to play with different Equalizer settings. (Navigate by using Rotary)

01 Press MENU 2 Sec > EQ Setting

02 With Rotary please select: Flat, News, Classic, Pop or Rock

03 Press SELECT to end

Resetting the radio

If you encounter problems with your radio you may reset the radio to Factory Setting as follows. (Navigate by using Rotary)

01 Press MENU > System Reset

02 Press Select and the System shall reset to factory setting

SCANSONIC P3000 BT

Band (Mode)	DAB, DAB+, FM AUX & BLUETOOTH
Output Power	2 Watts RMS
Loudspeaker	2.75” Full Range
Antenna	FM & DAB telescopic
Power / Battery	DC 6V / 4 x AA sized Alkaline Batteries
Inputs	DC 6V Aux Input
Outputs	Headphones
Dimensions	95mm(W) x 92mm(D) x 160mm(H)
Weight (Net)	650 g

enjoy

www.scansonic.dk